



34、全盤四通
All flange cross

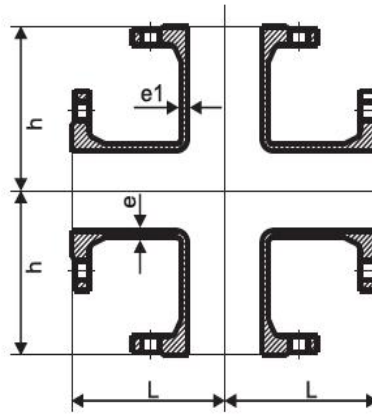

DN	e	Main		Main				Weight(kg)						
		L		dn	e1	h		Series A			Series B			
		Series A	Series B			Series A	Series B	PN10	PN16	PN25	PN10	PN16	PN25	
80	8.1	165	165	80	8.1	165	165	20.8	20.8	20.8	20.8	20.8	20.8	20.8
100	8.4	180	165	80	8.1	175	170	24.5	24.5	26.0	23.5	23.3	24.8	
		180	180	100	8.4	180	180	25.9	25.9	28.0	25.9	25.9	28.0	
125	8.7	200	175	80	8.1	190	185	30.7	30.7	32.7	28.4	28.4	30.0	
		200	185	100	8.4	190	195	32.0	32.0	34.7	30.5	30.4	32.5	
		200	200	125	8.7	200	200	34.0	34.0	36.7	34.0	34.0	36.4	
		220	180	80	8.1	205	200	38.0	38.0	41.3	34.1	34.1	36.7	
150	9.1	220	190	100	8.4	210	205	39.3	39.3	42.7	36.3	36.3	39.5	
		220	205	125	8.7	215	215	41.3	41.3	45.3	39.6	39.6	42.9	
		220	220	150	9.1	220	220	43.3	43.3	48.0	43.3	43.3	48.0	
200	9.8	260	190	80	8.1	235	225	56.0	55.3	61.3	46.5	46.7	51.5	
		260	200	100	8.4	240	230	57.3	56.0	63.3	48.9	49.1	54.5	
		260	220	125	8.4	240	240	59.3	58.4	65.7	53.1	53.2	58.8	
		260	230	150	9.1	250	245	61.3	60.7	68.0	56.8	56.9	63.1	
		260	260	200	9.5	260	260	66.0	65.3	74.7	65.9	66.0	73.2	
250	10.5	350	200	80	8.1	265	265	88.0	87.1	96.8	63.9	62.9	72.7	
		350	210	100	8.4	275	270	90.7	89.3	100.0	66.8	65.7	76.3	
		350	230	125	8.7	290	275	91.3	90.5	101.2	71.1	70.0	80.7	
		350	240	150	9.1	300	280	94.1	93.2	104.1	75.7	74.8	85.7	
		350	270	200	9.8	325	290	101.3	100.0	113.3	85.1	84.1	96.3	
300	11.2	350	300	250	10.5	350	300	109.3	108.0	124.0	97.1	95.6	110.3	
		400	210	80	8.1	290	295	122.0	121.2	135.1	83.1	82.3	96.1	
		400	225	100	8.4	300	300	125.3	124.0	140.0	86.9	86.1	100.7	
		400	240	125	8.7	310	300	125.3	124.5	139.2	91.6	90.8	105.5	
		400	250	150	9.1	325	310	128.0	127.2	142.3	96.7	95.9	110.9	
		400	280	200	9.8	350	320	136.0	134.7	152.0	107.6	106.8	123.1	
		400	310	250	10.5	375	330	142.5	141.2	160.0	120.1	118.8	137.6	
350	11.9	400	340	300	11.2	400	340	154.7	153.3	174.7	134.5	133.3	154.1	
		425	220	80	8.1	325	325	151.7	151.7	180.3	99.6	105.7	128.1	
		425	235	100	8.4	325	330	154.7	154.7	185.3	104.0	110.1	133.2	
		425	240	125	8.7	325	330	154.7	154.7	184.0	106.9	113.1	136.3	
		425	260	150	9.1	325	340	156.3	156.3	186.0	115.7	121.9	145.5	
		425	290	200	9.8	325	350	161.3	161.3	194.7	127.3	133.6	158.4	
		425	320	250	10.2	325	360	165.2	165.2	198.1	141.7	147.3	174.7	
		425	340	300	11.2	425	365	181.6	181.6	216.7	153.5	159.2	188.5	
400	12.6	425	380	350	11.6	425	382	189.3	189.3	234.7	171.1	180.3	213.9	
		450	235	80	8.1	350	355	187.9	187.9	229.7	121.3	138.7	163.2	
		450	245	100	8.4	350	360	190.7	190.7	236.0	125.4	142.9	168.3	
		450	250	125	8.7	350	345	190.4	190.4	233.1	128.3	145.6	170.9	

34、全盘四通
All flange cross

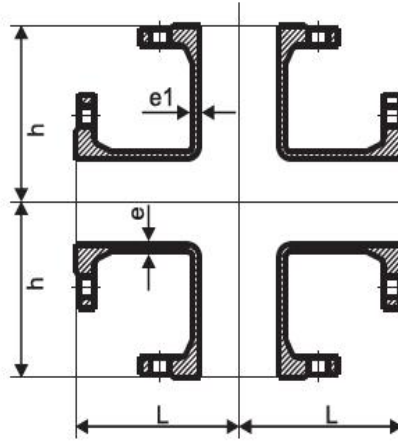

DN	e	Main		Main				Weight(kg)					
		L		dn	e1	h		Series A			Series B		
		Series A	Series B			Series A	Series B	PN10	PN16	PN25	PN10	PN16	PN25
400	12.6	450	275	150	9.1	350	370	192.3	209.6	235.3	138.9	156.3	182.0
		450	305	200	9.5	350	380	197.3	212.0	245.3	152.8	170.1	197.1
		450	330	250	10.5	350	390	200.8	217.7	247.1	167.7	184.5	214.0
		450	360	300	11.2	450	400	216.9	233.6	265.3	184.5	201.5	232.9
		450	380	350	11.9	450	410	223.2	244.3	279.3	196.3	216.7	252.4
		450	420	400	12.6	450	420	232.0	254.7	300.0	217.7	243.7	280.5
450	13.3	475	235	80	8.1	375	370	226.3	251.1	278.8	135.1	162.9	190.7
		475	260	100	8.1	375	375	227.3	252.0	280.5	147.6	172.3	200.8
		475	265	125	8.4	375	375	228.8	253.6	282.1	151.7	176.5	205.1
		475	285	150	9.1	375	400	230.5	255.3	284.3	162.0	186.8	215.7
		475	315	200	9.8	375	410	234.0	258.8	288.9	177.5	202.3	232.4
		475	345	250	10.5	375	420	238.8	263.1	282.4	194.8	219.1	251.7
		475	370	300	11.2	475	430	254.4	278.8	313.5	212.3	236.7	241.3
		475	395	350	11.9	475	440	260.3	288.8	327.1	226.5	254.4	293.3
		475	430	400	12.6	475	450	268.0	301.6	341.6	274.9	281.3	321.3
500	14	500	260	80	8.1	400	400	276.5	314.9	352.7	172.7	211.1	238.8
		500	270	100	8.1	400	400	280.0	321.3	353.3	178.0	216.4	244.8
		500	280	125	8.4	400	405	279.1	317.5	346.0	184.9	223.3	251.9
		500	300	150	9.1	400	410	280.8	319.2	341.8	195.5	233.9	262.9
		500	325	200	9.8	400	415	286.7	326.7	362.3	210.0	248.4	278.5
		500	340	250	10.5	400	430	288.7	326.5	359.2	222.5	260.4	293.1
		500	370	300	11.2	500	450	304.1	342.1	376.8	243.2	281.2	315.9
		500	405	350	11.9	500	465	309.6	351.7	390.0	264.4	305.9	344.8
		500	440	400	12.6	500	480	322.7	368.0	414.7	289.2	336.7	376.3
		500	470	450	13.3	500	490	323.9	374.7	416.3	309.2	360.0	401.6
		500	500	500	14.0	500	500	336.0	396.0	442.7	336.0	396.0	442.7
		600	15.4	550	260	80	8.1	450	450	394.7	461.3	494.4	232.7
550	275			100	8.4	450	450	395.6	462.3	496.0	240.7	307.3	341.1
550	290			125	8.7	450	450	397.1	463.7	497.6	250.5	317.2	351.1
550	325			150	9.1	450	455	398.7	465.3	499.6	272.3	338.9	373.2
550	350			200	9.8	450	460	406.7	477.3	517.3	289.5	356.3	391.7
550	370			250	10.5	450	480	405.9	472.0	510.0	306.8	373.1	410.9
550	405			300	11.2	550	500	420.8	487.1	527.1	333.9	400.1	440.1
550	440			350	11.9	550	520	425.7	496.1	539.7	361.2	430.9	475.2
550	465			400	12.6	550	530	438.7	516.0	569.3	381.2	456.5	501.9
550	485			450	13.3	550	540	438.1	517.2	564.1	399.6	464.3	509.3
550	500			500	14	550	545	448.1	534.0	580.9	418.9	504.8	551.7
550	550			600	15.4	550	550	473.3	578.7	636.0	473.3	578.7	636.0